



Conventional batteries are Lead Acid flooded batteries that must be filled before first use with a periodic maintenance. Conventional High Performance batteries include a sulfation retardant technology which reduces battery-killing plate sulfation.

This results in a longer battery life, especially in standby or storage mode. These conventional batteries are perfectly suitable for entry-level powersport and lawn & garden vehicles with standard requirements.




Acid pack included for activation

COMPATIBLE CHARGERS

- BS 10** Battery size up to 20Ah
- BS 15** Battery size up to 30Ah
- BS 30** Battery size up to 60Ah
- BS 60** Battery size up to 120Ah
- BK 20** Battery size up to 40Ah

- Acid pack included**  
For initial filling
- Periodic maintenance**  
Refilled with water if necessary
- Handle with care to prevent acid spillage**
- Long shelf life**  
No need to be recharged while stocked
- Internal gas emission through venting hole**
- Wide variety of 6V & 12V models**

MOUNTING ANGLES

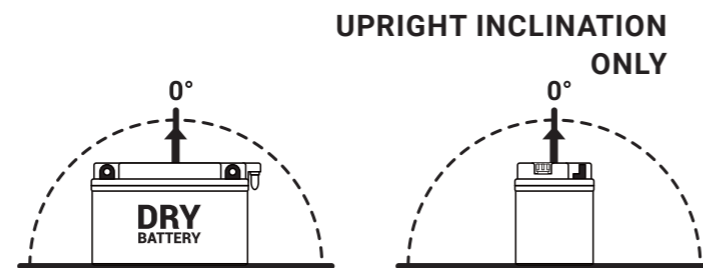

DID YOU KNOW?

Since February 1st 2021 the regulation (EU) 2019/1148 prohibits the sale of acid batteries to the public in Europe. DRY batteries can be stored for several years, as it is dry-charged battery.

BS BATTERY TYPE HIGH PERFORMANCE	BS CODE	CAPACITY AH (10HR)	CAPACITY AH (20HR)	CCA (EN) A (-18°C)	DIMENSIONS (±2MM)			ASSEMBLY LAYOUT	TERMINAL
					L	W	H		
12V BB2.5L-C	310729	2.5	2.6	20	80	70	105		-
BB3L-A	310589	3	3.2	30	98	56	110		B
BB3L-B	310588	3	3.2	30	98	56	110		B
BB4L-B	310590	4	4.2	50	120	70	92		A
BB4L-A	310661	4	4.2	50	120	70	92		A
BB5L-B	310591	5	5.3	65	120	60	130		B
BB6.5L-B	310732	6.5	7	65	138	73	107		B
BB7B-B	310662	7	7.4	85	150	60	130		B
BB7-A	310592	8	8.4	105	135	75	133		B
BB7C-A	310593	8	8.4	85	130	90	114		E
BB7L-B	310594	8	8.4	85	135	75	133		B
BB7L-B2	310595	8	8.4	85	135	75	133		A
BB9-B	310596	9	9.5	115	135	75	139		B
BB9L-B	310599	9	9.5	115	135	75	139		B
BB9L-A2	310598	9	9.5	100	135	75	139		A
BB9A-A	310597	9	9.5	100	135	75	155		B
BB10L-A2	310556	11	11.6	130	135	90	145		D
BB10L-B	310555	11	11.6	130	135	89	145		B
BB10L-B2	310557	11	11.6	130	135	89	145		D
BB10L-BP	310558	11	11.6	165	135	89	145		B
BB10A-A2	310660	11	11.6	160	135	89	155		D
BB12A-A	310561	12	12.6	155	134	80	160		B
BB12A-B	310562	12	12.6	155	134	80	160		B
BB12AL-A/A2	310564	12	12.6	155	134	80	160		B
BB12C-A	310566	12	12.6	155	134	80	175		A
BB14-A2	310567	14	14.7	175	134	89	166		D
BB14-B2	310568	14	14.7	175	134	89	166		D
BB14L-A	310778	14	14.7	190	134	89	166		B
BB14L-A2	310569	14	14.7	175	134	89	166		D
BB14L-B2	310570	14	14.7	175	134	89	166		D
SBB14L-A2	310575	14	14.7	175	134	89	166		D
SBB14L-B2	310741	14	14.7	175	134	89	166		D
BB14A-A2	310571	14	14.7	175	134	89	176		D
BB16-B	310577	19	20	215	175	100	155		B
BB16L-B	310578	19	20	215	175	100	155		B
BB16HL-A-CX	310822	19	20	255	175	100	155		B
BB16B-A	310580	16	16.8	210	160	90	161		A
BB16B-A1	310581	16	16.8	210	160	90	161		C
BB16AL-A2	310576	16	16.8	210	207	71.5	164		F
HBB16A-A/AB	310582	16	16.8	210	151	91	180		C



12V	BS BATTERY TYPE HIGH PERFORMANCE	BS CODE	CAPACITY AH (10HR)	CAPACITY AH (20HR)	CCA (EN) A (-18°C)	DIMENSIONS (±2MM)			ASSEMBLY LAYOUT	TERMINAL
						L	W	H		
	BB16CL-B	310579	19	20	250	175	100	175		A
	B50-N18L-A/A2/12N18-3A	310547	20	21.1	250	205	90	162		C
	B50-N18L-A3	310548	20	21.1	250	205	90	162		A
	SB50-N18L-AT	310656	20	21.1	250	205	90	162		C
	B50-N18A-A	310657	20	21.1	250	205	90	176		C
	BB18-A	310585	18	18.9	235	180	90	162		C
	BB18L-A	310586	18	18.9	235	180	90	162		C
	BB18L-A2	310727	18	18.9	235	180	90	162		C
	B60-N24-A	310551	28	29.5	280	184	124	175		G
	B60-N24L-A	310658	28	29.5	280	184	124	175		G
	B60-N24AL-B	310550	28	29.5	280	184	124	175		G
	B60-N30L-A	310554	30	31.6	300	184	130	170		G
	BB30L-B	310552	30	31.6	300	165	130	176		A
	BB30CL-B	310553	30	31.6	300	165	130	192		A
	BHD-12	310601	29	29.5	280	205	130	165		H
	51814	310545	-	19	210	186	82	171		-
	51913	310542	-	19	210	186	82	171		-
	52515	310543	-	30	300	186	130	170		G
	53030	310544	-	30	300	184	130	170		G
	53034	310659	-	31	300	184	130	170		G

12V	BS BATTERY TYPE	BS CODE	CAPACITY AH (10HR)	CAPACITY AH (20HR)	CCA (EN) A (-18°C)	DIMENSIONS (±2MM)			ASSEMBLY LAYOUT	TERMINAL
						L	W	H		
	12N5-3B	310533	5	5.3	40	120	61	130		B
	12N5.5-3B	310529	5.5	5.8	55	135	60	130		B
	12N5.5-4A	310530	5.5	5.8	55	135	60	130		F
	12N5.5-4B	310531	5.5	5.8	55	135	60	130		B
	12N5.5A-3B	310532	5.5	5.8	55	103	90	114		-
	12N6.5-3B	310901	6.5	6.8	55	137	66	100		B
	12N7-3A	310795	7	7.4	75	135	75	133		B
	12N7-3B	310534	7	7.4	75	135	75	133		B
	12N7-4A	310645	7	7.4	75	135	75	133		B
	12N7-4B	310535	7	7.4	75	135	75	133		B
	12N7A-3A	310800	7	7.4	70	150	60	130		B
	12N7A-4A	310902	7	7.4	70	150	60	130		B
	12N9-3B	310538	9	9.5	85	135	75	139		B
	12N9-4B-1	310537	9	9.5	85	135	75	139		B
	12N12A-4A-1	310527	12	12.6	120	134	81	160		B
	12N14-3B	310772	14	14.7	135	134	89	166		D



6V	BS BATTERY TYPE	BS CODE	CAPACITY AH (10HR)	CAPACITY AH (20HR)	CCA (EN) A (-18°C)	DIMENSIONS (±2MM)			ASSEMBLY LAYOUT	TERMINAL
						L	W	H		
	6N2A-2C	310508	2	2.1	-	70	47	96		-
	6N4-2A	310509	4	4.2	-	71	71	96		-
	6N4-2A-2	310708	4	4.2	-	71	71	96		-
	6N4-2A-3	310709	4	4.2	-	71	71	96		-
	6N4-2A-4	310510	4	4.2	-	71	71	96		-
	6N4-2A-6	310710	4	4.2	-	71	71	96		-
	6N4-2A-7	310512	4	4.2	-	71	71	96		-
	6N4-2A-8	310711	4	4.2	-	71	71	96		-
	6N4A-4D	310513	4	4.2	-	61	57	130		-
	6N4B-2A	310514	4	4.2	-	102	48	96		-
	6N4B-2A-3	310515	4	4.2	-	102	48	96		-
	6N4B-2A-4	310714	4	4.2	-	102	48	96		-
	6N4B-2A-5	310705	4	4.2	-	102	48	96		-
	6N6-3B	310518	6	6.3	-	99	57	111		B
	6N6-3B-1	310519	6	6.3	-	99	57	111		B
	6N6-1D-2	310517	6	6.3	-	99	57	111		-
	B49-6	310522	10	10.5	-	91	83	160		B
	B38-6A	310520	13	13.7	-	119	83	161		B
	6N11-2D	310503	11	11.6	-	150	70	100		B
	6N11A-1B	310501	11	11.6	-	122	62	131		B
	6N11A-4	310646	11	11.6	-	122	62	131		B
	6N11A-3A	310500	11	11.6	-	122	62	131		B
	6N11A-4A	310502	11	11.6	-	122	62	131		B
	B54-6 (6N12A-2C)	310523	12	12.6	-	156	57	116		B
	B54-6A (6N12A-2D)	310504	12	12.6	-	156	57	116		B
	6BB8L-B	310806	8	8.4	-	120	70	95		B

Non-exhaustive list

## DID YOU KNOW?

Our SLA (Sealed Lead Acid) range, factory activated and ready to use, can replace 95% of DRY batteries.

DRY batteries are not suitable for e-commerce SINCE 2021, a European decree prohibits handling of acid by the end user.